

Electro-Mechanical

Components

9.2 to 9.5



Electro-mechanical Components

Distribution box	9.2
Lighting	9.3
Door contact switch	9.3
Cable junction box	9.4
Equipotential bonding bar	9.4
Earthing bar	9.5
Contact clamp	9.5

Distribution Box



HEI00379

- For mounting installation engineering DIN rail components such as fuses, terminals, relays etc.
- When installed, the mounting level can be pulled out to the front and interlocked, thus considerably facilitating the wiring of individual components
Not with "fixed installation" model
On request: can be delivered ready equipped and cabled
Other options and models available on request
- Installation space for up to 22 installation devices of 18 mm width each
- Mounting of the TS35 DIN rail on several levels due to simple plug-in connection
Not with "fixed installation model"
Other options and models available on request
- "Snap-in" mounting of DIN rail components

- Free access to protective earth and neutral conductor rail from the front
- Different positioning options prepared for N and PE rails
Not with "fixed installation" model
On request: can be delivered ready equipped and cabled
Other options and models available on request
- Cable entry at the back via double brush strip (optional via bushing panel)
- Internal strain relief and thus accessible from the front
- Front labelling above and below the installation space
- Power uses for power distribution at 230 V AC, but also in the low voltage range (e.g. 48 V DC)
- 19" Chassis, 3 HU, depth 150 mm

Material / Finish

- Covers, powder-coated
- RAL 7035 light-grey, textured
- Main unit, sheet steel, zinc passivated

Supply schedule


- 1 Distribution box
Including N and PE rails, cable entry, strain relief, empty panel covers and earthing kit

How supplied

- Fully assembled

W	H	D	Model	Order no.	UP
19"	3 HU	150 mm	Pull-in	03.013.385.1	1 unit
19"	3 HU	158 mm	Fixed installation	03.013.470.1	1 unit

Distribution Box Bushing Panel

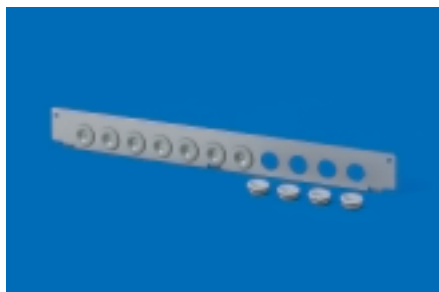

HEI00234

Alternative to cable entry via brush strip with mounting the distribution box in open racks

Material / Finish

- Sheet steel, zinc passivated

Supply schedule

- 1 Cable entry panel
11 Bushing sockets
Mounting material

W	H	D	Model	Order no.	UP
				03.013.386.1	1 unit

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth

HU = Standard height unit
UP = Unit of packaging
kg = Weight
 = Express Article



ELM00058

Luminestra Rack Lighting

- Only for rack type, miracel B 700, B 800
- Mounting on basic rack, over the vertical extrusions
- With fluorescent tube, 13 watt
- With on/off rocker switch
- With 2 m mains cable and protective contact plug
- Complete with mounting material
- Only with jumpering space of 123 mm on the front

Colour
White

Supply schedule
1 Luminestra rack light
2 Support brackets
Mounting material

W	H	D	HU/U	h	d	w	Model	Order no.	UP
65	65	365						01.131.227.9	1 unit



ELM00135

Compact Cabinet Lamp

- Features**
- With magnet mounting
 - Energy-effective lamp
 - Safety socket
 - On / Off switch
 - Power supply lead 3 m
 - With cover

Approval
VDE ICE

Protection rating IP20

- Technical data**
- Operating voltage
230 V / 50-60 Hz
 - Light material
Compact fluorescent lamp with integrated starter
 - Power consumption
11 W \triangleq 75 W filament lamp
 - Light intensity
900 Lm
 - Interference suppression
in accordance with VDE 0712, IEC 82
 - Socket
230 VAC / 16A
 - Connections
3-pole screw terminal, 2.5 mm² with strain relief

W	H	D	HU/U	h	d	w	Model	Order no.	UP
65	65	365						01.131.465.9	1 unit



ELM00137

Door Contact Switch

- On / off switch, 4 A, 230 V ~
- Activation with door opening and closing

Supply schedule
1 Door contact switch (not wired)
1 Mounting bracket
Mounting material

W	H	S	HU/U	h	d	w	Model	Order no.	UP
								01.110.722.9	1 unit

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth

HU = Standard height unit
UP = Unit of packaging
kg = Weight
 = Express Article



ELM00033

Cable Junction Box

- For on-site 230 V electro-installation
- As fixed location exchange point
- Simple and quick mounting
- Complete with mounting material

- Supply schedule**
- 1 Cable junction box
 - 1 Mounting bracket
 - Mounting material

W	H	D	HU/U	h	d	w	Model	Order no.	UP
								00.078.720.9	1 unit



ELM00114

Equipotential Bonding Bar

- For central earthing of all protective conductors
- With sealing cover
- Connection options:
 - 1 x Round conductor 8-10 mm Ø
 - 1 x Flat band (up to 30 mm wide) or round conductor (8-10 mm) Ø
 - 7 x One or several wire conductors up to 16 mm² or fine-wired conductor up to 10 mm²


- Material**
- Base plate and cover, impact-resistant plastic
 - Contact strip, brass, nickel-plated

- Supply schedule**
- 1 Equipotential bonding bar

W	H	S	HU/U	h	d	w	Model	Order no.	UP
								01.117.524.3	1 unit

Dimensions in mm: W = Width
 H = Height
 D = Depth
 h = Installation height
 d = Useful depth

HU = Standard height unit
 UP = Unit of packaging
 kg = Weight

 = Express Article



ELM00068

Earthing Bar

- For safe earthing and equipotential bonding of equipment and built-in units

Material

Electrolyt copper 9x9

Supply schedule

1 Earthing bar
2 Brackets
Mounting material

W	H	S	HU/U	h	d	w	Model	Order no.	UP
			24				For doubleprorack	01.240.546.9	1 unit
			21				For doubleprorack	01.240.545.9	1 unit
			18				For doubleprorack	01.240.544.9	1 unit
			15				For doubleprorack	01.240.543.9	1 unit
			45				For miracel	01.110.709.9	1 unit
			41				For miracel	01.110.708.9	1 unit
			12				For miracel	01.110.703.9	1 unit



DOP20016

Contact Clamp

- For safe connection of equipment and built-in units with the earthing bar
- For cables up to 25 mm²

Supply schedule

20 Contact clamps

W	H	S	HU/U	h	d	w	Model	Order no.	UP
								01.110.715.9	20 unit

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth

HU = Standard height unit
UP = Unit of packaging
kg = Weight
📦 = Express Article